12. How to disassemble of freezer compartment

12-1. COVER-EVAP.ASSY

1) Take out the items in the freezer
2) Dry off the wetness in the handle.

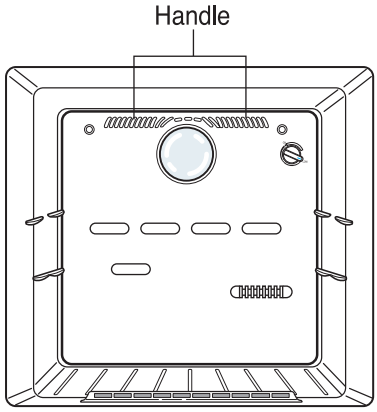

3) Hold the handle with the hand and press the elbow towards the COVER-EVAP, ASSY and press force downwards.

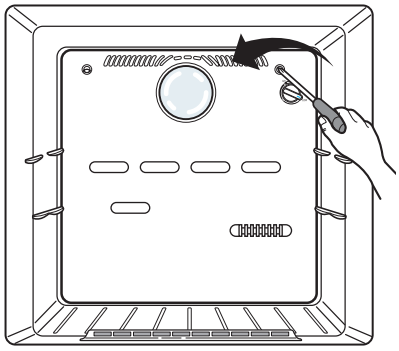

4) While pressing force downwards, pull the handle towards the front at the same time.

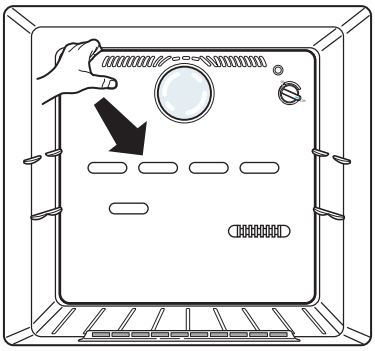

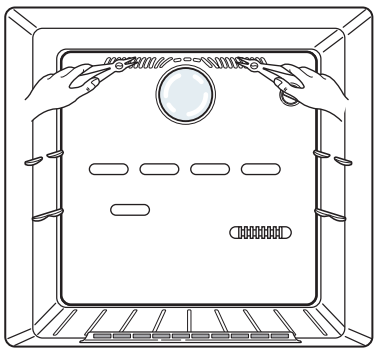

Reference : To improve the friction of the handle, use ruber gloves or pick-up tongs.
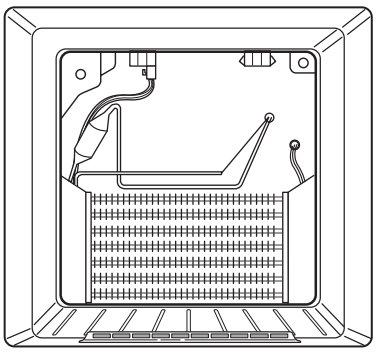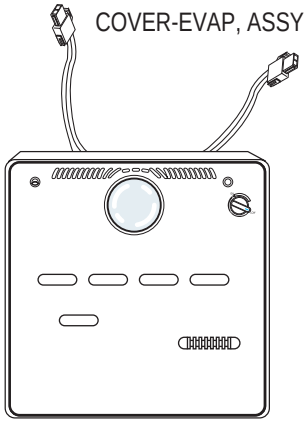
5) When the COVER-EVAP, ASSY is taken apart, take the necessary corrective measures and this time put them together.